

GRAIN > PORTABLE AUGERS >

HOSS AUGER

Loading a large bin? Piling grain in flat storage? Looking for high capacities and extreme reliability? You can rely on the HOSS. Available in lengths from 57' to 112'. The HOSS can move grain at speeds up to 11,000 BPH. Available in painted or galvanized finishes.



Sudenga®

INDUSTRIES, INC.



WWW.SUDENGA.COM

- 8", 10" and 13" diameter tubes
- Capacities to 11,000 bushels per hour
- 8" and 10" galvanized or painted finish; 13" painted finish
 - Hydraulic cylinder scissor lift
- Heavy duty top and side cable trussing (8" and 10"); rigid bridge top truss and cable side truss (13")

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com


**MADE
★ IN THE ★
USA**



GRAIN > PORTABLE AUGERS >

HOSS AUGER

- Large, low profile, auger hopper. Single hopper (8"/10"); Twin screw hopper (10"/13")
- Lengths available from 57' to 112'
- Low transport height (under 14') and width
- Twin cylinder hydraulic scissor lift (13" only)
- Narrow transport width features convenient extendable axles (13" only; 92'-112' models)

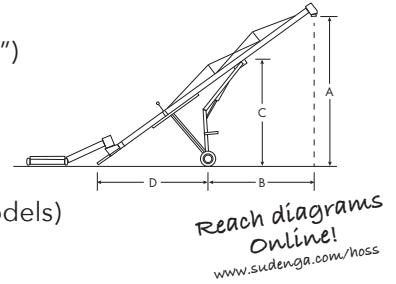

CAPACITIES & SPECS

	8" AUGERS	10" AUGERS	13" AUGERS
Tube Lengths	57', 61', 65', 71'	61', 66', 71', 76', 81'	72', 82', 92', 102', 112'
Capacities	3,200 BPH	7,000 BPH	11,000 BPH
Tube Gauge	14	12	12
Tube Finish	Painted or galvanized		Painted
Flighting	3/16"	3/16" UltraFlyte	1/4" UltraFlyte



Driveline: Direct constant velocity joint on PTO-to-flighting connection; shear pin protection

Transport: Hydraulic scissor lift; 4-bolt rims (8" augers), 6-bolt rims (10" all sizes/13" 72'-82' augers), 8-bolt rims (13" 92'-112' augers); roller bearings for road transport. Transport widths: 10' (8" augers) and 10½' (10"/13" augers). Transport height under 14'.




Swing Hopper: Mechanically driven by roller chain and double gearbox from auger flight; gimbal mount is easy to position; sealed hopper joint keeps weather out and grain in; 10" and 13" hoppers are hinged at the hopper to incline joint. CV joint is standard on 10" and 13". Hopper intake flighting for single screw is 5/16" (8") and .25 UltraFlyte (10"). Flighting for twin screw is 3/8" thick (10"/13").

ACCESSORIES & OPTIONS

	8"	10"	13"
1/4" Ga. Flighting	Optional	Optional	Standard
Discharge Spout	Optional	Optional	Optional
Overflow Spout	Optional	Optional	Optional
Bucket Spout	Optional	Optional	Optional
4' Screen - Hopper Incline Tube	Optional	Optional	-
Low Profile Twin Screw Hopper	-	Optional	Standard
Power Rotation for Hopper	-	Optional	Optional
Side Drive Kit*	Optional	Optional	Optional

* Puts tractor at 90° to auger for more hopper swing.

Electric hopper rotate kit: Moves the hopper into and out of loading position. Optional on 10" and 13" augers.

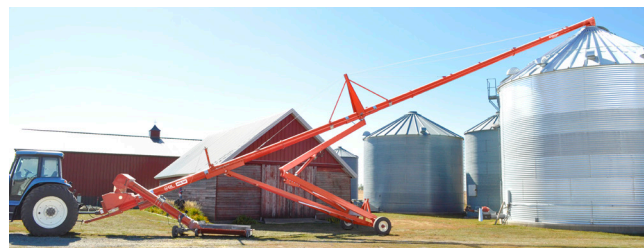

**MADE
IN THE
USA**

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com