

GRAIN PILE PICKUP >
ULTRA SCOOP

Pick up millions of bushels of grain fast with Sudenga's 20,000 BPH Ultra Scoop.
Loads a typical grain trailer from your flat storage pile in as little as 3 minutes.
Features a 16' long by 16" diameter horizontal pick up auger with a 6' detachable wing.



Sudenga®
INDUSTRIES, INC.



WWW.SUDENGA.COM

- 20,000 BPH
- 40' inclined conveyor
- Three-wheel transport provides an exceptionally low transport height.
 - Easy to mount and dismount
- Hydraulic power raises, lowers and rotates spout
 - Conveyor features liners and heavy duty chain

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com

MADE
★IN THE★
USA

GRAIN PILE PICKUP > ULTRA SCOOP

Pick up millions of bushels of grain fast with Sudenga's 20,000 BPH Ultra Scoop.

Loads a typical grain trailer from your flat storage pile in as little as 3 minutes. Fits most tractors. Recommended mounting on 150 HP tractors and up. The Ultra Scoop from Sudenga features a 16' long by 16" diameter horizontal pick up auger with a 6' detachable wing. The 40' inclined chain conveyor has abrasion resistant liners and heavy duty chain to ensure long life and wear characteristics. The three-wheel transport provides an exceptionally low transport height.



Tractor requirements: The distance from the 3-point hitch pins to the leading edge of the front tires can be up to 216" (18 ft.) maximum. The distance from the center of the PTO shaft to the end of the outside axle can be up to 60" maximum.

STANDARD FEATURES

- 20,000 BPH
- 40' inclined conveyor
- 16' wide scoop with a 6' detachable wing that folds for legal highway transport.
- Three-wheel transport provides an exceptionally low transport height.
- Easy to mount and dismount
- Hydraulic power raises, lowers and rotates spout
- Conveyor features liners and heavy duty chain
- 5/16" thick flight, 16" diameter intake auger
- Chain and gearbox drives designed for strength and simplicity
- Fits most late model tractors with 150 HP or more; 1,000 rpm PTO

ULTRA SCOOP

BY **Sudenga**
EQUIPMENT, INC.


"I have run over 100 million bushels and counting through it. The Ultra Scoop has not only impressed me, but my customers as well, with the speed in which we can pick up grain."

Read more: bit.ly/ultrascooptestimonial

CONVEYOR REACH AND ELEVATION

	Transport (12°)	23°	36° (shown)
A: Overall Height	12' 7"	21' 2"	30' 3"
B: Discharge Height	–	14' 1"; 10'	25'; 20' 2"
C: Discharge Reach	–	27' 5"; 23' 3"	23' 7"; 20' 5"
D: Secondary Height	–	10' 10"	16' 10"
E: Overall Length	50' 3"	53' 9"; 49' 8"	49' 5"; 46' 3"

NOTE: Two dimensions are given at 23° and 36°. The first is with the spout raised (as shown). The second is with the spout at the lowest angle. In transport (12°), the overall length is with the spout rotated back under the conveyor.

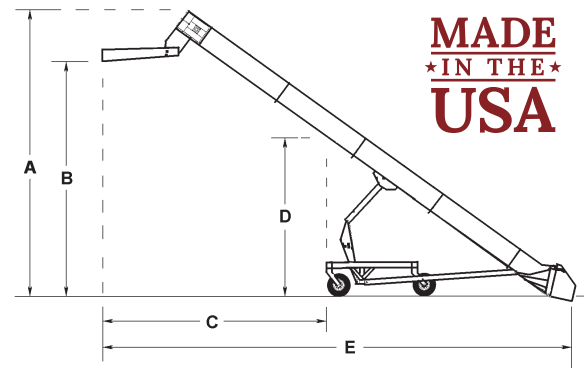

Wood block hanger bearings



Heavy duty 4-blade flipper



Chain drive

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com